




LED COMMERCIAL STRIP

35W / 4FT / 120-277V

#CS2-354-4

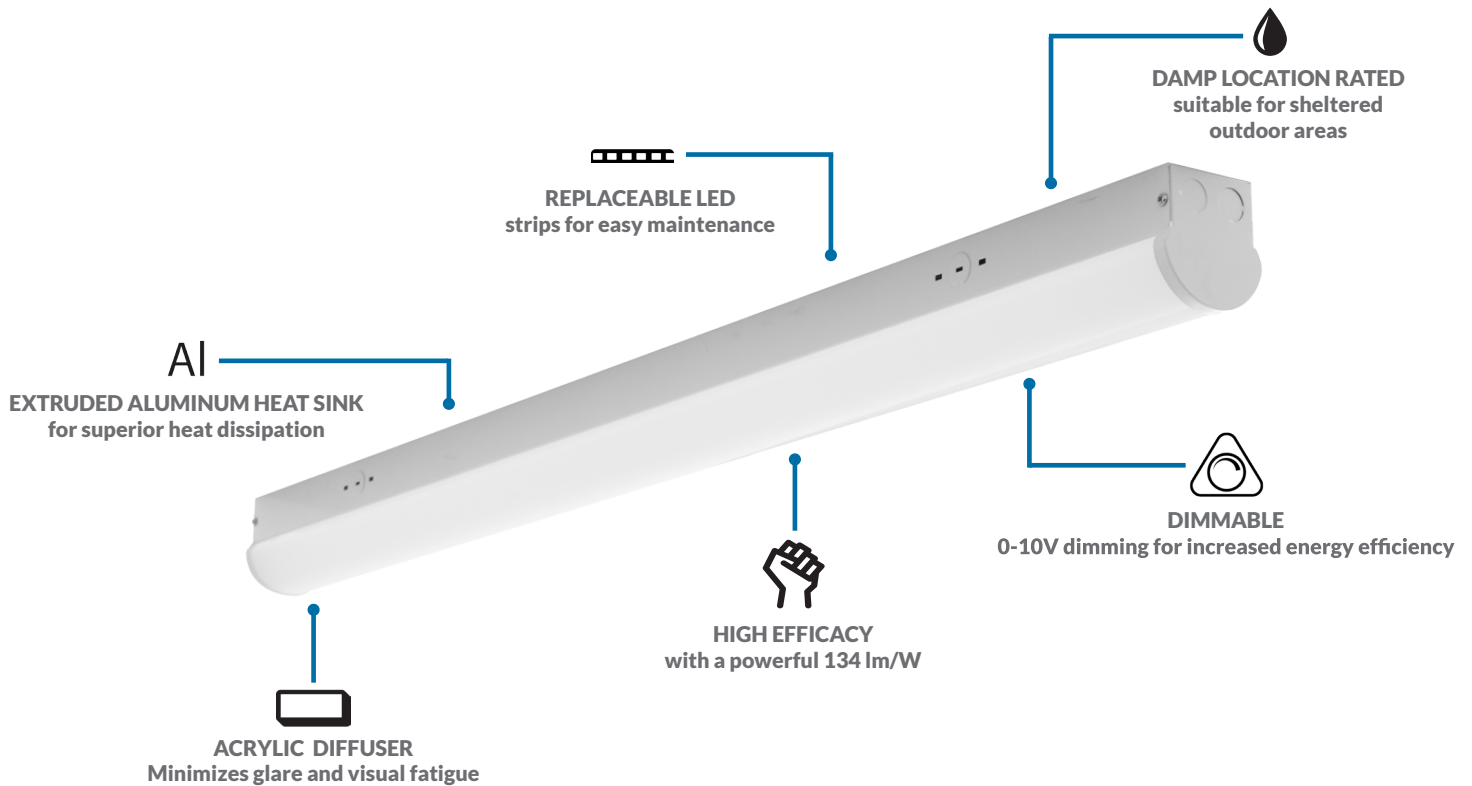

**10 YEAR
WARRANTY**

DESCRIPTION

The CS2 Series Commercial Strip fixtures are ideal for use in stairwells, common areas, and utility rooms. Its acrylic diffuser provides even, low glare light, and its exceptionally long life reduces maintenance costs. With 0-10V dimming and a high efficacy that meets today's stringent standards, these fixtures are the best solution if you are looking for dependable illumination in commercial conditions that bring maximum energy savings. Installation options include ceiling and wall mounting, making it versatile for any application.

POPULAR APPLICATIONS



STAIRWAYS






COMMON AREAS



UTILITY ROOMS

PRODUCT DIMENSIONS / PHOTOMETRIC SPECS / ILLUMINANCE AT A DISTANCE

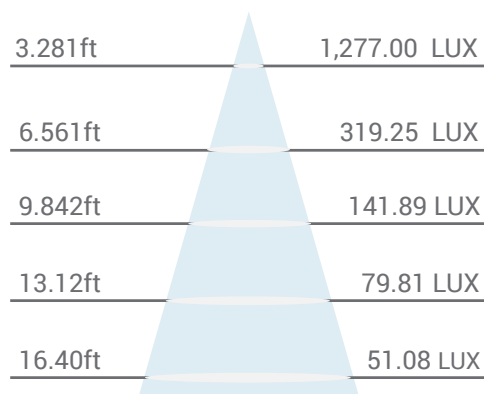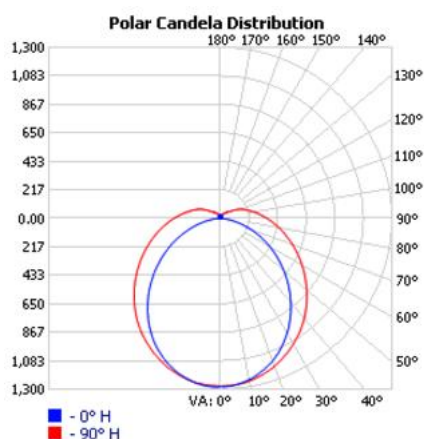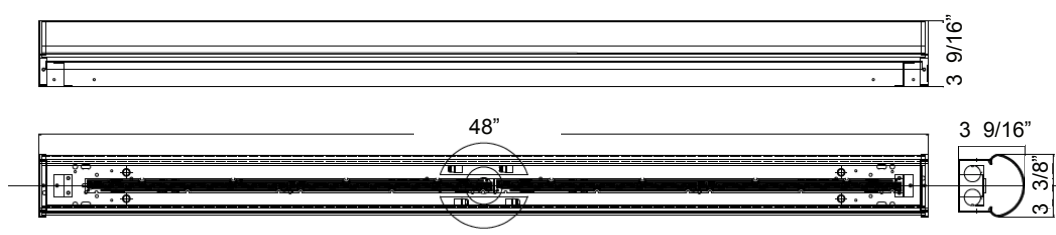

TECHNICAL DATA

| LIGHT SPECIFICATIONS | | ELECTRICAL | | TEMPERATURE | |
|----------------------|-----------------------|---------------------|--------------------------------|----------------------|------------------------|
| Lumens | 4,690 | Wattage | 35W | Minimum Start | -20°C |
| Efficacy | 130 lm/W | System Watts | 35W | Ambient Temp | 50°C |
| CCT | 4000K | Input Voltage | 120-277V | DIMENSIONS & WEIGHT | |
| CRI | ≥80 | THD | <20% | Dimensions | 48" x 3 3/8" x 3 9/16" |
| Replaces | 1 X 2-LAMP T8 FIXTURE | Power Factor | 0.90 | Weight | 2.3 KGS |
| Dimmable | 0-10V | CONSTRUCTION | | APPROVALS & LISTINGS | |
| DRIVER | | Housing Material | Powder Coated Galvanized Steel | cUL | IFAM7.E473127 |
| Driver Type | Constant Current | Lens Material | Acrylic (PMMA) | DLC Listed | PB9EUJ19 |
| Driver Output | 24-45V | Damp Location Rated | Yes | IESNA | LM-79 & LM-80 |
| Class 2 Driver | UL1310 Class 2 | LED CHIP | | | |
| HOURS | | Chip Brand | SEOUL SEMICONDUCTOR | | |
| Rated Hours | 50,000 | Chip Type | SMD 3528 | | |